

How to Remove Filler Stacks on Platinum RTX750

What you will need:

- 7/16th Rotary Ratchet (Twist Action Handle) or 7/16th Ratchet
- Small step ladder

Open the front Red Door. Then unscrew the top and bottom door screw.




2. Rotate to filler stack near where you want to add/remove stack panels. It's preferable to remove a filler stack without a motor. (In our example we will be removing filler 101 which also houses 10A and 10B.)



3. Using a 7/16th rotary ratchet remove the 4 bolts under the filler stack.

How to Remove Filler Stacks on Platinum RTX750

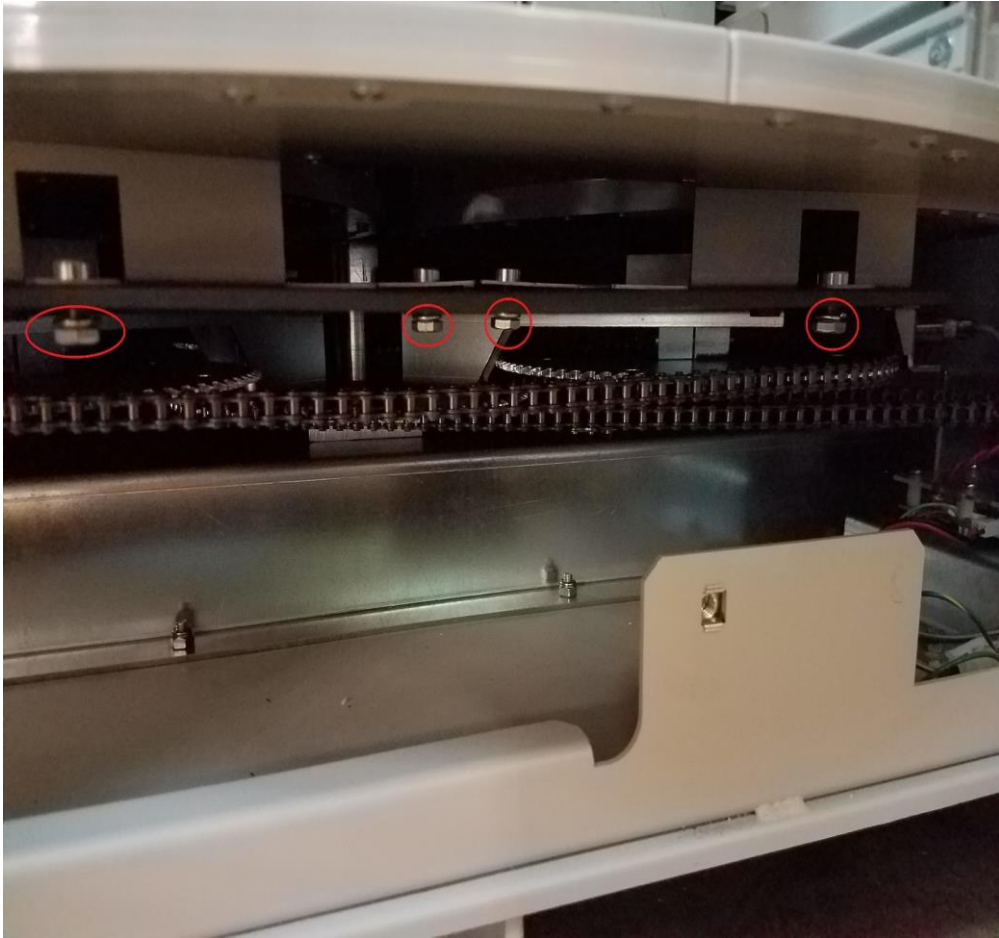

4. Use a step ladder to access the top of the filler stack. Using a 7/16th rotary ratchet remove the 3 bolts on top of the filler stack.



5. Remove the filler stack by grabbing it by the sides and pulling it towards you until ejected from the machine.

6. To reinstall the filler stack you will perform the steps in reverse order.